




53' Auto Drop Van

Air-ride, Swing-door

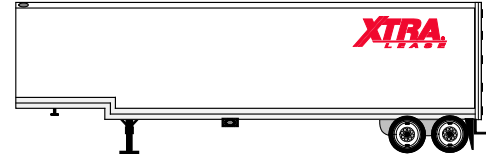

FEATURES AND BENEFITS

All XTRA Lease trailers are spec'd to increase efficiency/productivity, resist damage, ease loading and reduce maintenance costs.

SPECIFICATIONS

Overall Length	53'
Overall Width	102"
Deck Length	10'- front deck, 41'- rear deck
Overall Height	13' 6"
Coupler Height	47"
Kingpin Setting	36"
Dock Height	35"
Inside Width	99" at liner
Inside Height	107-1/2"- front of drop, 125-1/2"- rear of drop
Door Opening	125" height x 98" width
Cubic Capacity	4,370 cubic feet
Weight	17,300 lbs +/- 3%
Suspension	Fixed position tandem axles with air-ride suspension. Airbags equipped with self-regulating height control valve and manual dump valve
Axles	5/8" axle wall, 25,000 lb. capacity with synthetic wheel-end lubricant
Tires	215/75R 17.5 premium radial tires
Wheels	6.75" x 17.5" steel stud-piloted wheels
Brakes	12-1/4" x 7-1/2" x 3/4" s-cam, quick-change brake shoes
ABS	2 sensor / 1 modulator-valve system
Upper Coupler	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
Crossmembers	4" steel I-beam crossmembers on 12" centers. Inverted-hat crossmembers from landing gear forward



53' Auto Drop Van

Air-ride, Swing-door

SPECIFICATIONS

Landing Gear	AAR certified, 2-speed self-lubricating landing gear with internal gearbox and cushion sand shoes
Posts	Galvanized steel posts on 24" centers, 12" centers from landing gear forward
Roof	One piece aluminum roof
Floor	1-3/8" laminated hardwood floor secured by 3 screws per board at each crossmember
Scuff - Sides	2 rows of 16" x 3/16" flat steel located at floor line and 60" above floor. Roof: 4 rows of galvanized steel scuff liner. Face of Drop: 1" hardwood overlaid with flat steel plate, full height and width
Scuff – Ceiling	2 outer rows of steel scuff running full length of trailer. Additional protection in approximately the last 14'
Rear Doors	3/4" plymetal construction swing-doors, with 6 hinges and 2 locking-rods per door
Lights & Wiring	Sealed-beam lights with a fully sealed wiring harness and internal ground
Electrical Connections	7-way ATA plug with no circuit breakers
Air Connections	Swivel gladhands mounted on roadside

Trailer specification features may vary based upon model year, trailer type and location. Equipment is subject to availability at each location.