




Straight-frame, Sliding Tandem Flatbed 48' x 102", Spring-ride

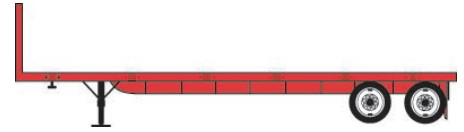

FEATURES AND BENEFITS

All XTRA Lease flatbeds are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

Loader Friendly

- Cargo Control Combination Winches

Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

Damage Resistant

- Integrated Aluminum Side Rub Rails

SPECIFICATIONS

Overall Length	48'
Overall Width	102"
Deck Height	55"
Coupler Height	49"
Kingpin Setting	30"
Weight	10,813 lbs. (including bulkhead) +/- 3%
Suspension	Full slide range, variable-position tandem axles with spring-ride suspension.
Axles	Tapered spindle, 1/2" axle wall, 22,500 lb. capacity with synthetic wheel-end lubricant
Tires	295/75R 22.5 radial tires for slider application
Wheels	8.25" x 22.5" steel hub-piloted wheels
Brakes	16-1/2" x 7" x 3/4" s-cam, quick-change, extended life brake shoes
ABS	2 sensor / 1 modulator-valve system
Upper Coupler	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
Main Frame	Fabricated high-tensile steel main beams
Side Rails	Aluminum with integrated routed stake packets
Rub Rails	Integrated into side rail
Stake Pockets	Internal aluminum stake pockets on 24" centers. Full length both sides, front and rear. Two load securement openings between pockets
Crossmembers	4" steel I-beam crossmembers on 12" centers



Straight-frame, Closed-tandem Flatbed 48' x 102", Spring-ride

SPECIFICATIONS

Landing Gear	AAR certified, self – lubricating 2-speed landing gear with internal gearbox and cushion sand shoes.
Cargo Control	Full length integrated aluminum double L type sliding winch track on both sides. (12) standard sliding winches located on roadside. Includes sliding rope hook/winch strap hook retainers opposite of winches.
Floor	1-1/8" aluminum floor with four apitong nailer strips
Bulkhead	48" flat, removable aluminum bulkhead
Lights & Wiring	Sealed-beam lights with a fully sealed wiring harness and internal ground
Electrical Connections	7-way ATA plug with no circuit breakers
Air Connections	Stationary gladhands mounted flush on roadside

Trailer specification features may vary based upon manufacturer, model year, trailer type and location.
Equipment is subject to availability at each location.