




# Straight-frame, Spread-axle Flatbed 48', Air-ride

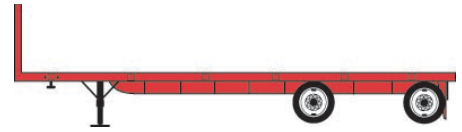

## FEATURES AND BENEFITS

All XTRA Lease trailers are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

### Loader Friendly

- Cargo Control Sliding Winches
- Auxiliary Dump Valve
- Spread Axle for Increased Payload Capacity
- Center Coil Package

### Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

### Damage Resistant

- Integrated Aluminum Side Rub Rails

## SPECIFICATIONS

<b>Overall Length</b>	48'
<b>Overall Width</b>	102"
<b>Deck Height</b>	51"
<b>Coupler Height</b>	49"
<b>Kingpin Setting</b>	30"
<b>Kingpin to Rear Axle</b>	43' (California maximum is 40')
<b>Weight</b>	10,200 lbs. +/- 3% (includes aluminum bulkhead)
<b>Suspension</b>	Fixed 10' 2" spread axle, air-ride suspension. Both Rear and CA Legal settings available. Airbags equipped with self-regulating height control valve, electric dump valve on rear axle wired to auxiliary socket, mounted at nose. Automatic gladhand dump valve dumps air when parking brake is set.
<b>Axles</b>	7/16" axle wall, 23,000 lb. capacity with synthetic wheel-end lubricant
<b>Tires</b>	295/75R 22.5 radial tires for spread axle application
<b>Wheels</b>	8.25" x 22.5" steel hub-piloted wheels
<b>Brakes</b>	16-1/2" x 7" x 3/4" s-cam, quick-change, extended life brake shoes
<b>ABS</b>	4 sensor / 2 modulator-valve system
<b>Upper Coupler</b>	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
<b>Main Frame</b>	Fabricated high-tensile steel main beams
<b>Side Rails</b>	Aluminum with integrated routed stake pockets



# Straight-frame, Spread-axle Flatbed 48', Air-ride

## SPECIFICATIONS

<b>Rub Rails</b>	Integrated into side rail
<b>Stake Pockets</b>	Internal aluminum stake pockets on 24" centers. Full length both sides, front and rear. Two load securement openings between pockets.
<b>Crossmembers</b>	4" steel I-beam crossmembers on 12" centers, center coil package
<b>Landing Gear</b>	AAR certified, self – lubricating 2-speed landing gear with internal gearbox and cushion sand shoes.
<b>Cargo Control</b>	Roadside combination winches with sliding rope hook/winch. Strap hook retainers opposite of winches.
<b>Floor</b>	1-1/8" aluminum floor with (4) apitong nailing strips
<b>Bulkhead</b>	48" flat, removable aluminum bulkhead with restraint brackets
<b>Lights &amp; Wiring</b>	Sealed-beam lights with a fully sealed wiring harness and internal ground
<b>Electrical Connections</b>	7-way ATA plug with no circuit breakers
<b>Air Connections</b>	Stationary gladhands mounted flush on roadside

Trailer specification features may vary based upon manufacturer, model year, trailer type and location. Equipment is subject to availability at each location.